


**Note:** Preferred upper deflective limit is 15% of pad thickness

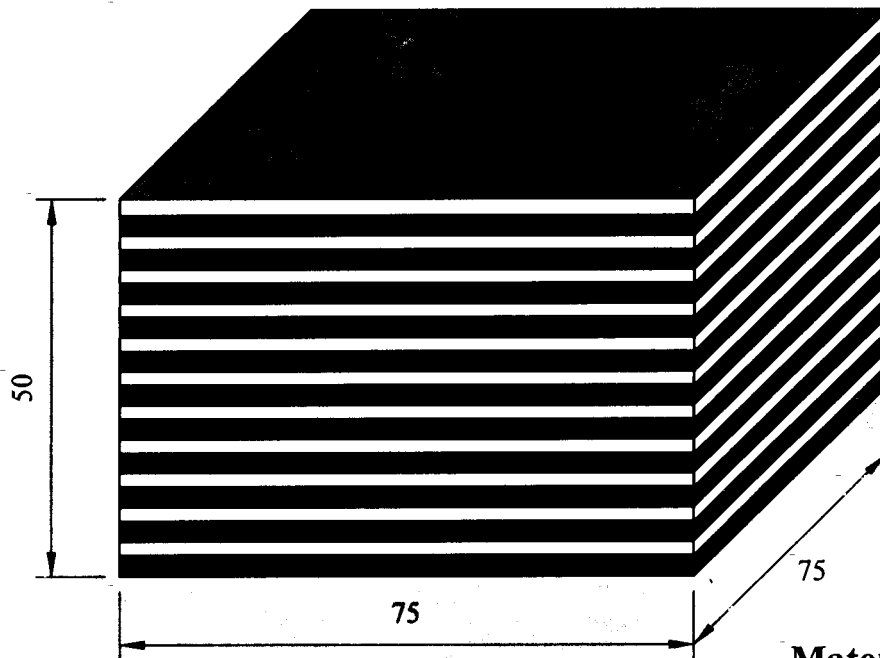

**Options:**

Typical dimensions can be varied if required. Steel galvanised plates can be fixed top and bottom

**Materials available:**

Rubber - Type Ref. BB/R  
 Neoprene- Type Ref. BB/N  
 or  
 In Bridge Bearing Neoprene stock to BS 5400 Part 9 or BS 2752 C 60 - Type Ref. BB/BN

NOTE: ALL DIMENSIONS IN MM  
 STANDARD ENGINEERING TOLERANCE +/- 1MM, UNLESS OTHERWISE STATED  
 RESEARCH & DEVELOPMENT IS ONGOING & UNLESS STAMPED CERTIFIED  
 (VALIDITY 3 MONTHS) THIS DATA SHEET IS ONLY CORRECT AT DATE OF ISSUE



**EUROVIB (Acoustic Products) Limited**

Goodwood House, 86 Holmethorpe Avenue, Redhill, Surrey RH1 2NL  
 Telephone: 01737 779577 Facsimile: 01737 779537

GENERAL ARRANGEMENT DRAWING

**Model BB Building Bearing Blocks**

THE COPYRIGHT OF THIS DRAWING AND THE RIGHT OF REPRODUCTION THEREOF IS VESTED IN AND BELONGS TO EUROVIB (ACOUSTIC PRODUCTS) LIMITED

Drawing No: GA/025/999/Rev0

Date: SEPT 1999